


PART NUMBER SYSTEM

EXAMPLE:

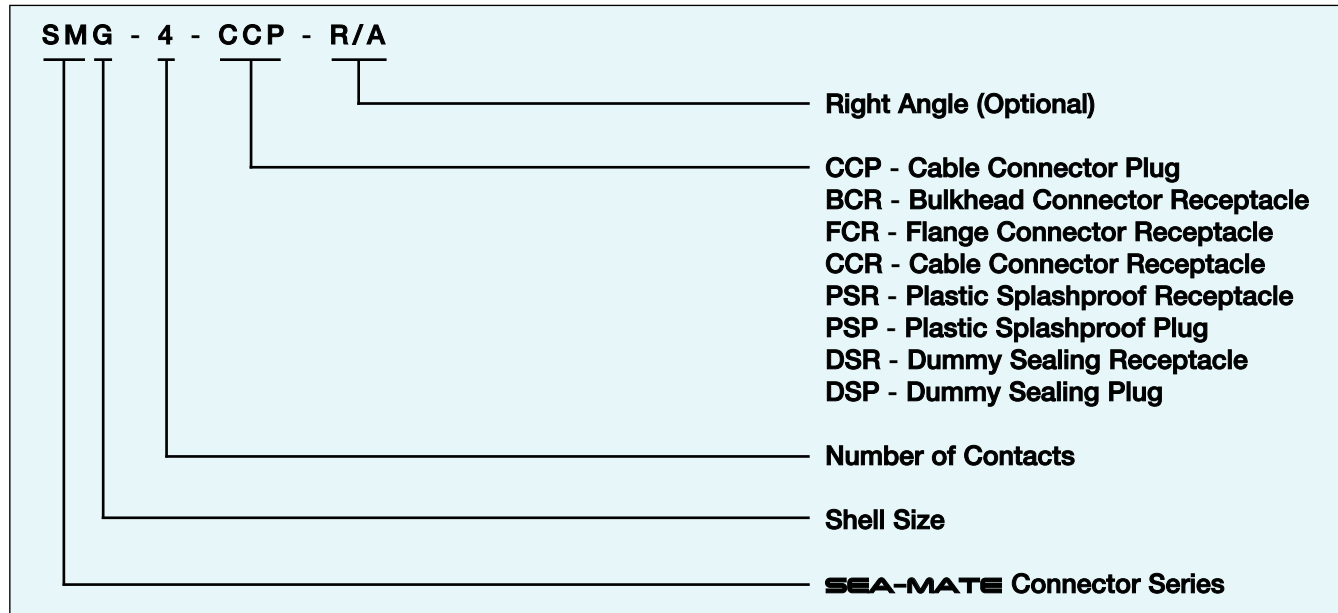

GENERAL INFORMATION

COMPONENT	MATERIAL
<b>BULKHEAD BODY (BCR/FCR)</b>	316L SS
<b>CCP BODY</b>	316L SS c/w Aluminium Bronze NES 833 engaging nut
<b>ELECTRICAL CONTACTS</b>	Brass CZ124 gold plated as per MIL-G-45204
<b>O-RING (BULKHEAD/FCR)</b>	Nitrile

CATEGORY	VALUE
<b>MATED PRESSURE</b>	Up to 7,500 psi (5,200m water depth)
<b>OPEN FACE PRESSURE</b>	Up to 7,500 psi (5,200m water depth)
<b>VOLTAGE RATING</b>	600 VDC/440 VAC
<b>CURRENT RATING</b>	Up to 10 amps Up to 50 amps new high power version Dependent on cable conductor size

**NOTE:**

Connectors are designed for installation on one atmosphere vessels. For all other applications please contact SEACON.