


**WET-CON SERIES
BH-MP
(12 - 16 contacts)**


WET-CON Bulkhead Connector Male Plug
Mates with IL-FS
Dummy Connector: DC-FS

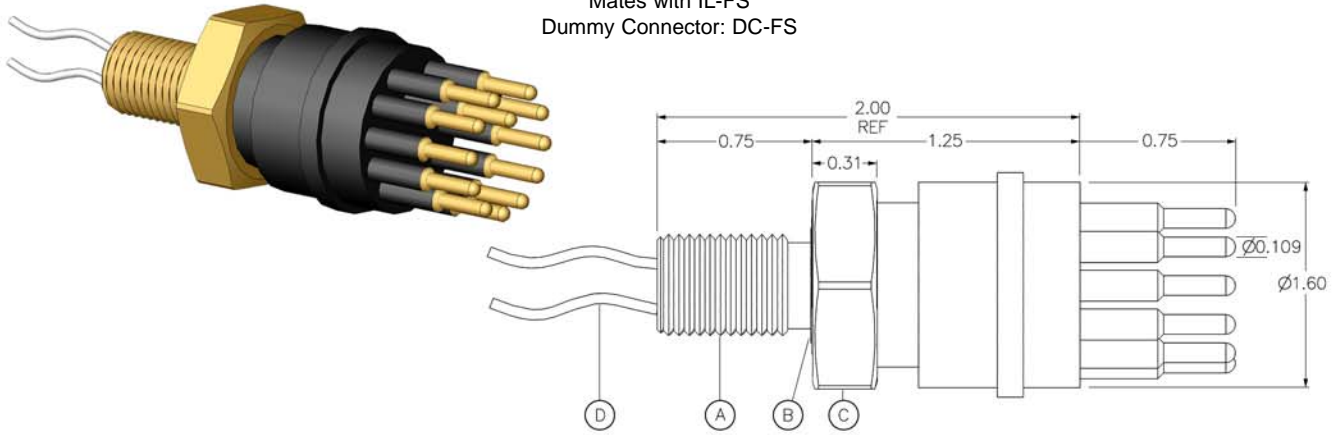

CONNECTOR	A - THREAD	B - O-RING	C - HEX FLATS (INCHES)	D - HOOK-UP WIRE
BH-12-MP	5/8-18 UNF-2A	2-017	1.00	18 AWG
BH-16-MP	3/4-16 UNF-2A	2-118	1.25	18 AWG

**WET-CON SERIES
BH-FS
(12 - 16 contacts)**

WET-CON Bulkhead Connector Female Socket
Mates with IL-MP
Dummy Connector: DC-MP

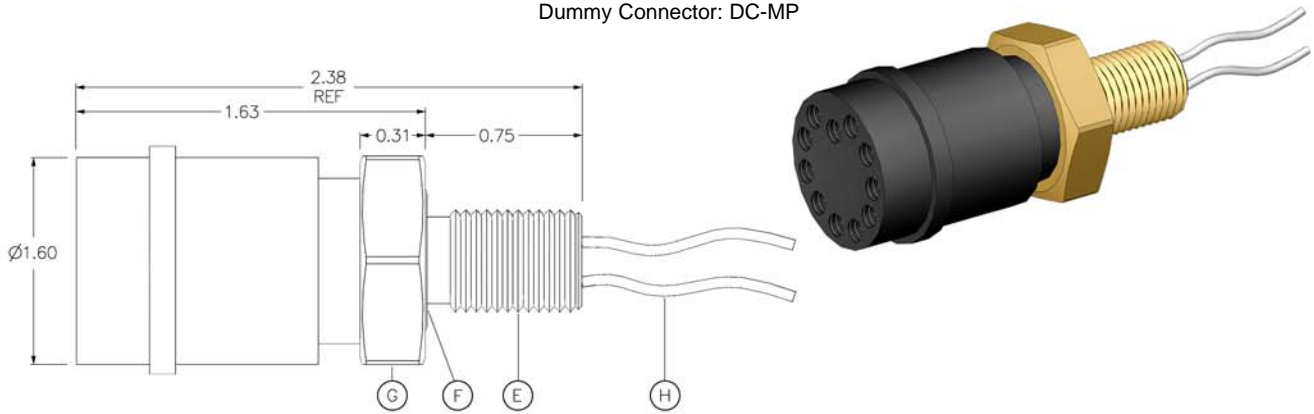

CONNECTOR	E - THREAD	F - O-RING	G - HEX FLATS (INCHES)	H - HOOK-UP WIRE
BH-12-FS	5/8-18 UNF-2A	2-017	1.00	18 AWG
BH-16-FS	3/4-16 UNF-2A	2-118	1.25	18 AWG

NOTES:

- Bulkhead Mounting Torque: 5/8 Thread = 85 inch pounds. 3/4 Thread = 85 inch pounds.
- Locking Sleeve: Optional (see page 10).
- Nut and washer: Optional.
- Dummy Connector: Optional.
- Dummy Shorting Plug: Optional.
- O-Ring: Nitrile (formerly known as Buna N).
- Bulkhead leads are tagged with pin number.
- Connectors must be lubricated before mating.
- Torque values referenced in this literature assume installation into dry metal threads. For other applications, please contact SEA CON® for recommendations.
- Connectors are designed for installation on one atmosphere vessels. Contact SEA CON® for recommendations if using compensated vessels.
- For contact configurations please refer to page 14.