


**WET-CON SERIES  
IL-MP  
(2 - 10 contacts)**


WET-CON In-Line Connector Male Plug  
Mates with BH-FS and IL-FS  
Dummy Connector: DC-FS

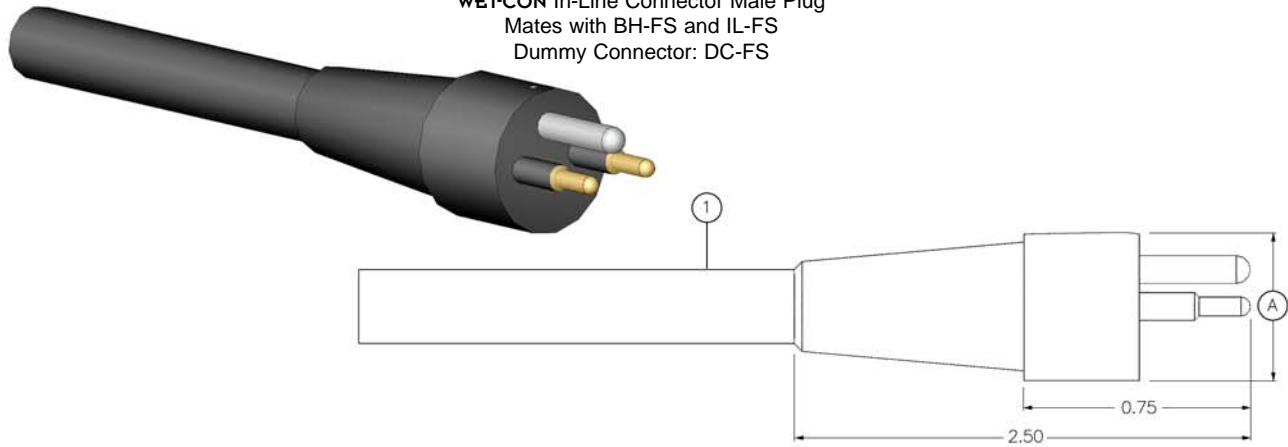

CONNECTOR	A - Ø (INCHES)	1 - CABLE
IL-2-MP	1.00	18/2 SO
IL-3-MP	1.00	18/3 SO
IL-4-MP	1.00	18/4 SO
IL-6-MP	1.25	18/6 SO
IL-8-MP/MPX*	1.25	18/8 SO
IL-10-MP	1.25	18/10 SO

**WET-CON SERIES  
IL-FS  
(2 - 10 contacts)**

WET-CON In-Line Connector Female Socket  
Mates with BH-MP and IL-MP  
Dummy Connector: DC-MP

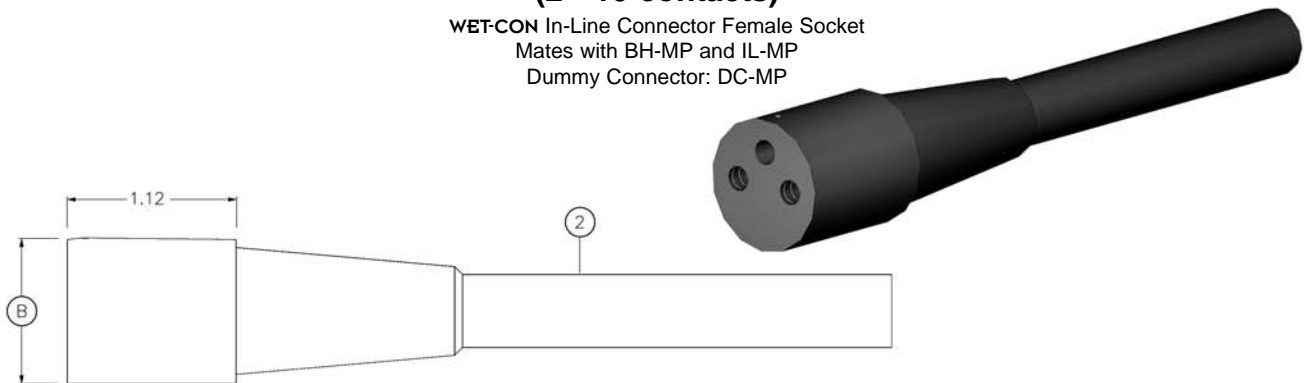

CONNECTOR	B - Ø (INCHES)	2 - CABLE
IL-2-FS	1.00	18/2 SO
IL-3-FS	1.00	18/3 SO
IL-4-FS	1.00	18/4 SO
IL-6-FS	1.25	18/6 SO
IL-8-FS/FSX*	1.25	18/8 SO
IL-10-FS	1.25	18/10 SO

**NOTES:**

- Locking Sleeve: Optional (see page 10).
- Dummy Connector: Optional.
- Dummy Shorting Plug: Optional.
- Connectors must be lubricated prior to mating.
- \* No guide pin. MPX/FSX connectors are recommended for new applications.